Chapter 4: Threads

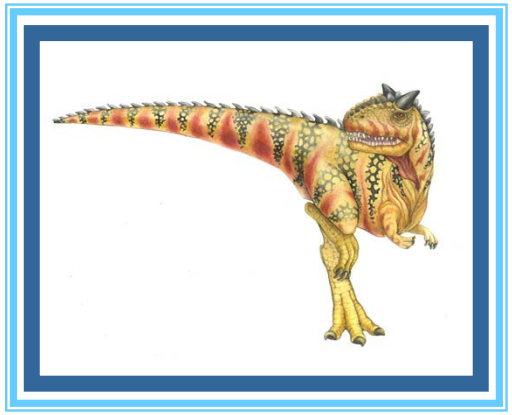

Chapter 4: Threads

- Overview
- Multicore Programming
- Multithreading Models
- Thread Libraries
- Implicit Threading
- Threading Issues
- Operating System Examples

Objectives

- To introduce the notion of a thread—a fundamental unit of CPU utilization that forms the basis of multithreaded computer systems
- To discuss the APIs for the Pthreads, Windows, and Java thread libraries
- To explore several strategies that provide implicit threading
- To examine issues related to multithreaded programming
- To cover operating system support for threads in Windows and Linux

NEED FOR THREADS

Motivation

- Most applications are multitask
- Multiple tasks with the application can be implemented by separate threads
  - Update display
  - Fetch data
  - Spell checking
  - Answer a network request
- Process creation is heavy-weight

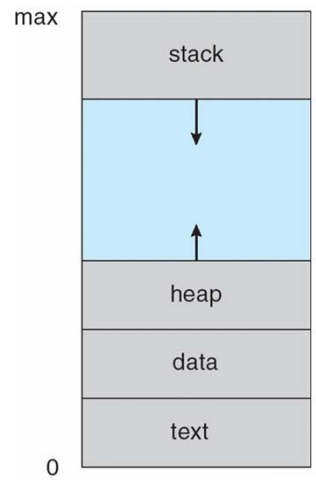

- Thread creation is light-weight
- Can simplify code, increase efficiency
- Kernels are generally multithreaded

Multithreaded Server Architecture

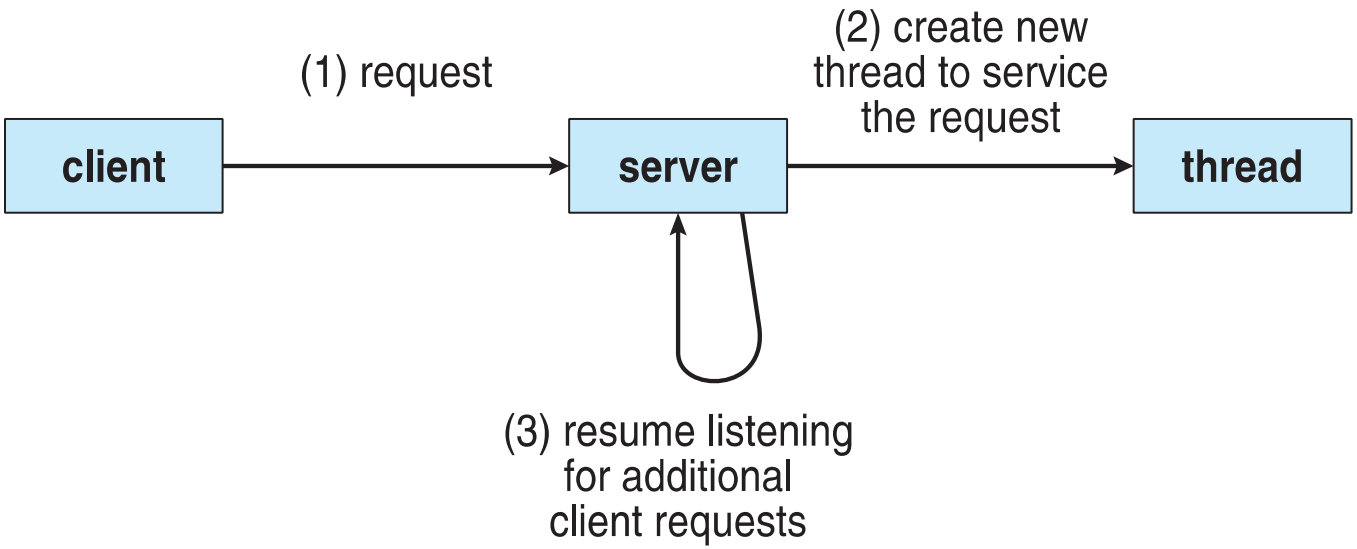

Single and Multithreaded Processes

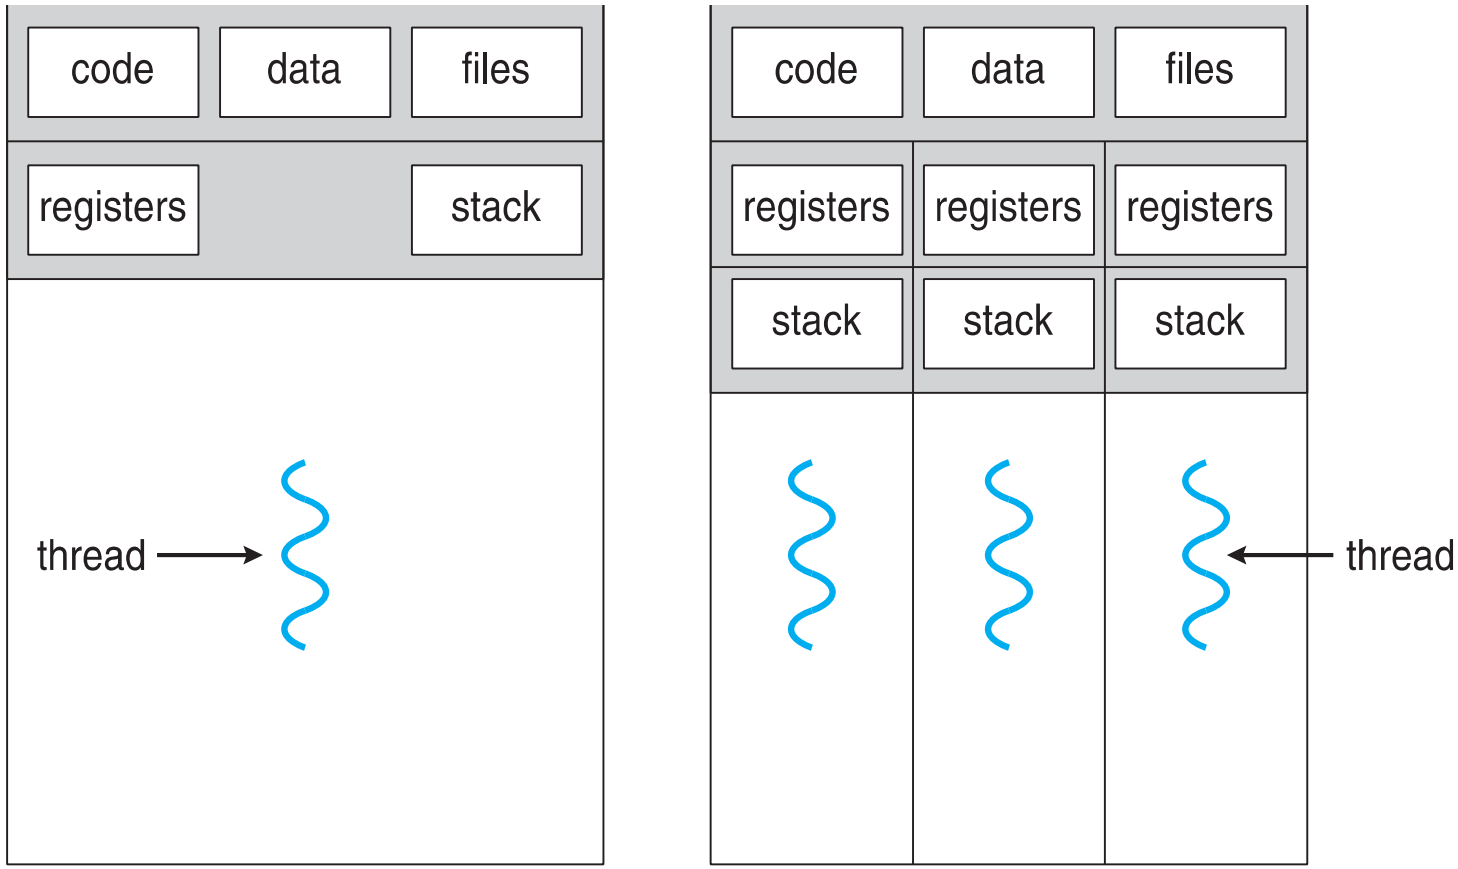

single-threaded process

multithreaded process

Benefits

- **Responsiveness –** may allow continued execution if part of process is blocked, especially important for user interfaces
- **Resource Sharing –** threads share resources of process, easier than shared memory or message passing
- **Economy –** cheaper than process creation, thread switching lower overhead than context switching
- **Scalability –** process can take advantage of multiprocessor architectures

MULTICORE PROGRAMMING

Multicore Programming

- **Multicore** or **multiprocessor** systems putting pressure on programmers, challenges include:
  - **Dividing activities**
  - **Balance**
  - **Data splitting**
  - **Data dependency**
  - **Testing and debugging**
- ***Parallelism*** implies a system can perform more than one task simultaneously
- ***Concurrency*** supports more than one task making progress
  - Single processor / core, scheduler providing concurrency

Concurrency vs. Parallelism

- **Concurrent execution on single-core system:**

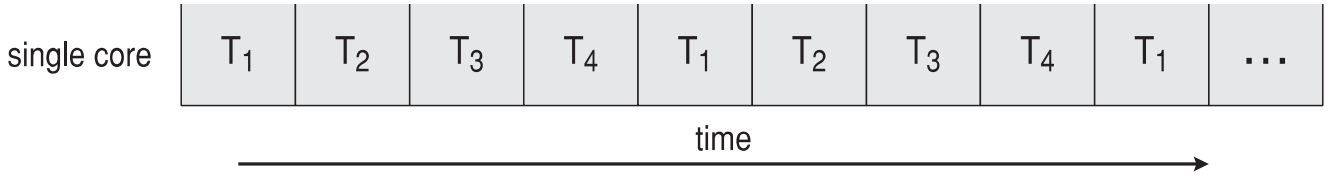

- **Parallelism on a multi-core system:**

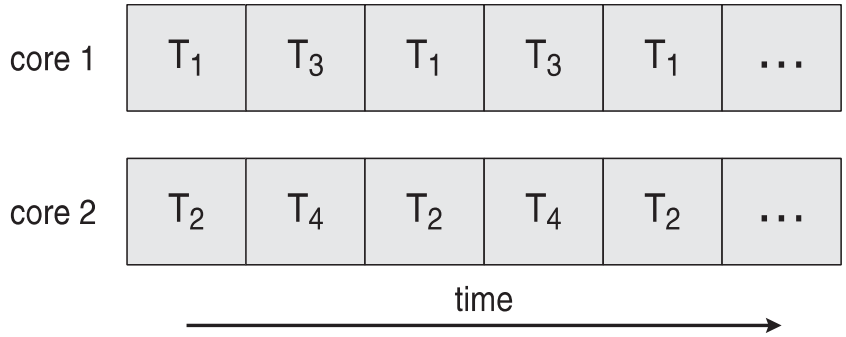

Multicore Programming (Cont.)

- Types of parallelism
  - **Data parallelism** – distributes subsets of the same data across multiple cores, same operation on each
  - **Task parallelism** – distributing threads across cores, each thread performing unique operation
- As # of threads grows, so does architectural support for threading
  - CPUs have cores as well as ***hardware threads***
  - Consider Oracle SPARC T4 with 8 cores, and 8 hardware threads per core

Amdahl's Law

- Identifies performance gains from adding additional cores to an application that has both serial and parallel components
- *S* is serial portion
- *N* processing cores

$$speedup \leq \frac{1}{S + \frac{(1-S)}{N}}$$

- That is, if application is 75% parallel / 25% serial, moving from 1 to 2 cores results in speedup of 1.6 times
- As *N* approaches infinity, speedup approaches 1 / *S*

Serial portion of an application has disproportionate effect on performance gained by adding additional cores

- But does the law take into account contemporary multicore systems?

MULTITHREADING MODELS

User Threads and Kernel Threads

- **User threads** - management done by user-level threads library
- **Kernel threads** - Supported by the Kernel
- Examples – virtually all general purpose operating systems, including:
  - Windows
  - Solaris
  - Linux
  - Tru64 UNIX
  - Mac OS X

Multithreading Models

- Many-to-One
- One-to-One
- Many-to-Many

Many-to-One

- Many user-level threads mapped to single kernel thread
- One thread blocking causes all to block
- Multiple threads may not run in parallel on muticore system because only one may be in kernel at a time
- Few systems currently use this model
- Examples:
  - **Solaris Green Threads**
  - **GNU Portable Threads**

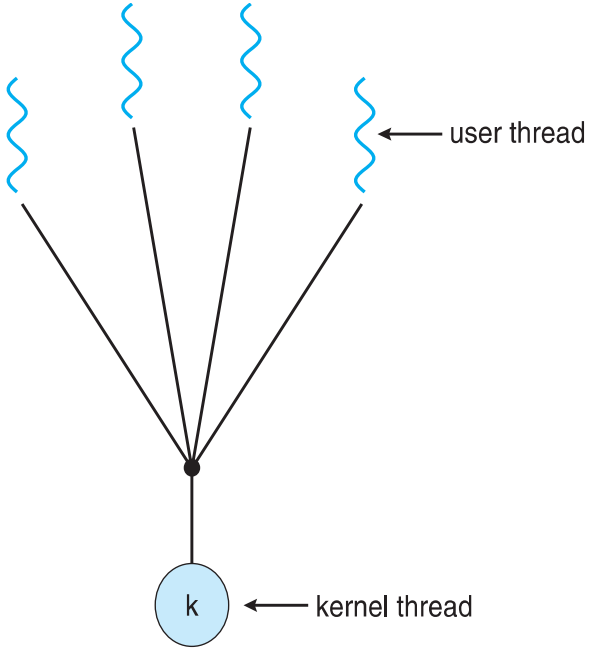

One-to-One

- Each user-level thread maps to kernel thread
- Creating a user-level thread creates a kernel thread
- More concurrency than many-to-one
- Number of threads per process sometimes restricted due to overhead
- Examples
  - Windows
  - Linux
  - Solaris 9 and later

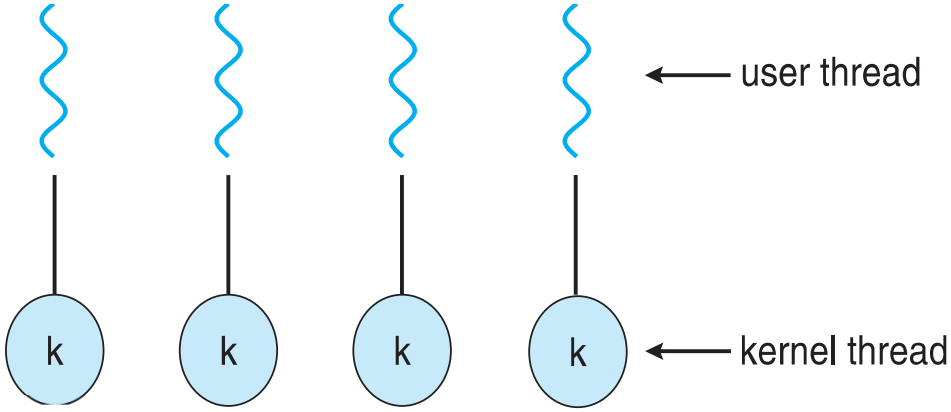

Many-to-Many Model

- Allows many user level threads to be mapped to many kernel threads
- Allows the operating system to create a sufficient number of kernel threads
- Solaris prior to version 9
- Windows with the *ThreadFiber* package

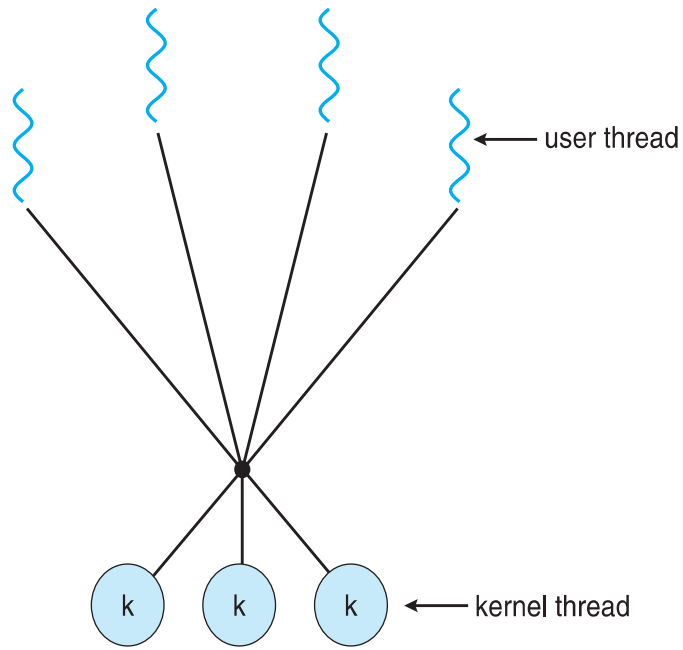



Two-level Model

- Similar to M:M, except that it allows a user thread to be **bound** to kernel thread
- Examples
  - IRIX
  - HP-UX
  - Tru64 UNIX
  - Solaris 8 and earlier

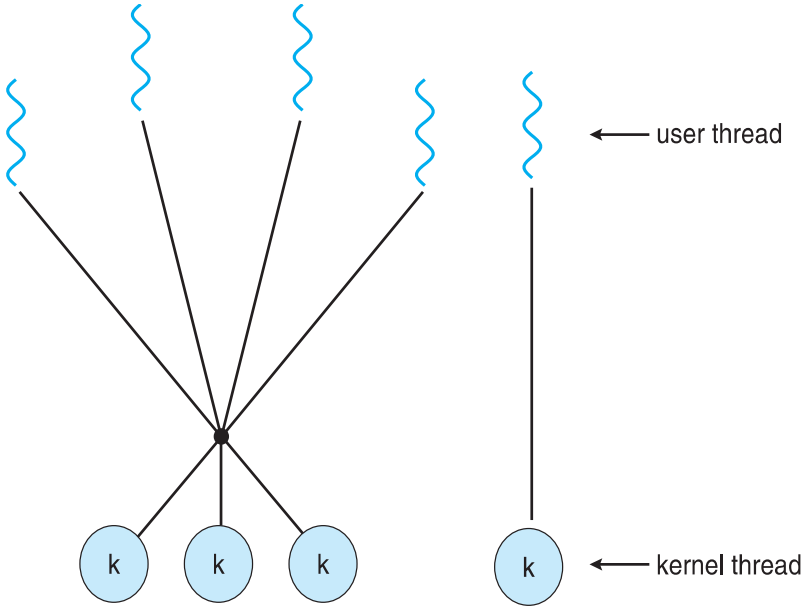

THREAD LIBRARY

Thread Libraries

- **Thread library** provides programmer with API for creating and managing threads
- Three primary thread libraries:
  - POSIX **Pthreads**
  - Windows threads
  - Java threads

Pthreads

- May be provided either as user-level or kernel-level
- A POSIX standard (IEEE 1003.1c) API for thread creation and synchronization
- ***Specification***, not ***implementation***
- API specifies behavior of the thread library, implementation is up to development of the library
- Common in UNIX operating systems (Solaris, Linux, Mac OS X)

Pthreads Example

http://www.weebly.com/uploads/6/9/3/5/6935631/pthreads.c

Windows Multithreaded C Program

http://www.weebly.com/uploads/6/9/3/5/6935631/winthreads.c

IMPLICIT LIBRARY

Implicit Threading

- Growing in popularity as numbers of threads increase, program correctness more difficult with explicit threads
- Creation and management of threads done by compilers and run-time libraries rather than programmers
- Three methods explored
  - Thread Pools
  - OpenMP
  - Grand Central Dispatch
- Other methods include Microsoft Threading Building Blocks (TBB), **`java.util.concurrent`** package

Thread Pools

- Create a number of threads in a pool where they await work
- Advantages:
  - Usually slightly faster to service a request with an existing thread than create a new thread
  - Allows the number of threads in the application(s) to be bound to the size of the pool
- Windows API supports thread pools:

```
DWORD WINAPI PoolFunction(AVOID Param) {
    /*
    * this function runs as a separate thread.
    */
}

QueueUserWorkItem(&PoolFunction, NULL, 0);
```

OpenMP

- Set of compiler directives and an API for C, C++, FORTRAN
- Provides support for parallel programming in shared-memory environments
- Identifies **parallel regions** – blocks of code that can run in parallel

```
#pragma omp parallel
```

Create as many threads as there are cores

```
#pragma omp parallel for
   for(i=0;i<N;i++) {
    c[i] = a[i] + b[i];
}
```

Run for loop in parallel

```
#include <omp.h>
#include <stdio.h>

int main(int argc, char *argv[])
{
   /* sequential code */

   #pragma omp parallel
   {
      printf("I am a parallel region.");
   }

   /* sequential code */

   return 0;
}
```

Grand Central Dispatch

- Apple technology for Mac OS X and iOS operating systems
- Extensions to C, C++ languages, API, and run-time library
- Allows identification of parallel sections
- Manages most of the details of threading
- Block is in "^{ }" - `^{ printf("I am a block"); }`
- Blocks placed in dispatch queue
  - Assigned to available thread in thread pool when removed from queue

Grand Central Dispatch

- Two types of dispatch queues:
  - serial – blocks removed in FIFO order, queue is per process, called **main queue**
    - Programmers can create additional serial queues within program
  - concurrent – removed in FIFO order but several may be removed at a time
    - Three system wide queues with priorities low, default, high

```
dispatch_queue_t queue = dispatch_get_global_queue
   (DISPATCH_QUEUE_PRIORITY_DEFAULT, 0);

dispatch_async(queue, ^{ printf("I am a block."); });
```

THREADS ISSUES

Threading Issues

- Semantics of **fork()** and **exec()** system calls
- Signal handling
  - Synchronous and asynchronous
- Thread cancellation of target thread
  - Asynchronous or deferred
- Thread-local storage
- Scheduler Activations

Semantics of fork() and exec()

- Does **`fork()`** duplicate only the calling thread or all threads?
  - Some UNIXes have two versions of fork
- **`exec()`** usually works as normal – replace the running process including all threads

Signal Handling

- **Signals** are used in UNIX systems to notify a process that a particular event has occurred.
- A **signal handler** is used to process signals
  1. Signal is generated by particular event
  2. Signal is delivered to a process
  3. Signal is handled by one of two signal handlers:
     1. default
     2. user-defined
- Every signal has **default handler** that kernel runs when handling signal
  - **User-defined signal handler** can override default
  - For single-threaded, signal delivered to process

Signal Handling (Cont.)

- Where should a signal be delivered for multi-threaded?
  - Deliver the signal to the thread to which the signal applies
  - Deliver the signal to every thread in the process
  - Deliver the signal to certain threads in the process
  - Assign a specific thread to receive all signals for the process

Thread Cancellation

- Terminating a thread before it has finished
- Thread to be canceled is **target thread**
- Two general approaches:
  - **Asynchronous cancellation** terminates the target thread immediately
  - **Deferred cancellation** allows the target thread to periodically check if it should be cancelled
- Pthread code to create and cancel a thread:

```
pthread_t tid;

/* create the thread */
pthread_create(&tid, 0, worker, NULL);

. . .

/* cancel the thread */
pthread_cancel(tid);
```

Thread Cancellation (Cont.)

- Invoking thread cancellation requests cancellation, but actual cancellation depends on thread state

Mode	State	Type
Off	Disabled	–
Deferred	Enabled	Deferred
Asynchronous	Enabled	Asynchronous

- If thread has cancellation disabled, cancellation remains pending until thread enables it
- Default type is deferred
  - Cancellation only occurs when thread reaches **cancellation point**
    - I.e. **`pthread_testcancel()`**
    - Then **cleanup handler** is invoked
- On Linux systems, thread cancellation is handled through signals

Thread-Local Storage

- **Thread-local storage** (**TLS**) allows each thread to have its own copy of data
- Useful when you do not have control over the thread creation process (i.e., when using a thread pool)
- Different from local variables
  - Local variables visible only during single function invocation
  - TLS visible across function invocations
- Similar to **`static`** data
  - TLS is unique to each thread

Scheduler Activations

- Both M:M and Two-level models require communication to maintain the appropriate number of kernel threads allocated to the application
- Typically use an intermediate data structure between user and kernel threads – **lightweight process** (**LWP**)
  - Appears to be a virtual processor on which process can schedule user thread to run
  - Each LWP attached to kernel thread
  - How many LWPs to create?
- Scheduler activations provide **upcalls** - a communication mechanism from the kernel to the **upcall handler** in the thread library
- This communication allows an application to maintain the correct number kernel threads

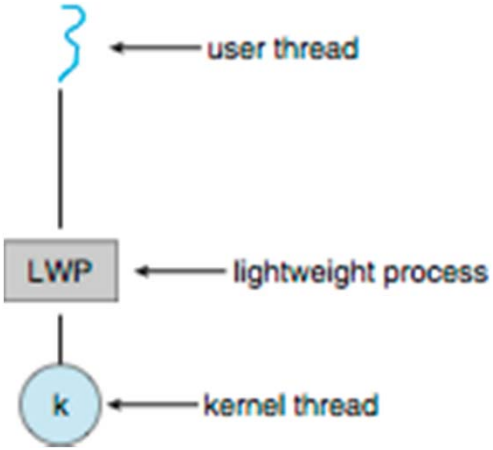

End of Chapter 4